




GLOW
GLOW6DIP65CCTB
GLOW6DIP65CCTBMO
GLOW6DIP65CCTW
GLOW6DIP65CCTWMO

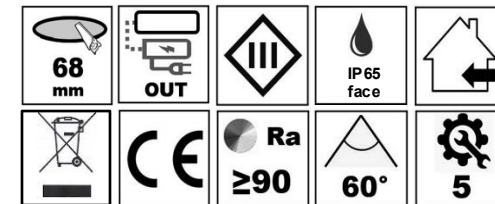

NOTICE DE MONTAGE/GEBRUIKSAANWIJZING/GEBRAUCHSANLEITUNG/MOUNTING INSTRUCTIONS

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please

-20°C < Ta < +40°C, 220-240V ~ 50/60Hz, Class III, IP65 face
Suitable for mounting on a normally flammable surface. Dimmable with selected leading and trailing edge dimmers

Installation

1. Ensure mains supply is switched off before commencing work.
2. Before cutting, ensure that the hole does not impinge on joists, pipe work, cables or other building services.
3. This luminaire requires a round hole Ø70mm to be cut into the ceiling for correct installation.
4. Connect supply: L – Brown, N – Blue.
5. Move switch on the driver to select colour temperature: 2700K, 3000K or 4000K.
WARNING: DO NOT CHANGE CCT on driver WHEN THE FITTING IS ON!!
6. Hold retention spring vertically against the heat sink, push fitting through the cut-out until the springs come down on the upper side of the plasterboard. Ensure that the fitting is secure and the bezel is tight against the ceiling.

The luminaire may be covered with mineral wool thermal insulation or glass wool thermal insulation of the type described in EN 13162:2015. This applies to both solid and blow over loose fill. If the installer wishes to use cellulose based loose insulation or foam spray over insulation, they must use a bell-shaped insulation cover over the luminaire. Although the fitting may be safely covered with insulation material, we recommend that the luminaire be abutted to but not covered with insulation material in order to maximise the lifetime of the luminaire. Luminaire lifetime can be maximised by maintaining as low an operating temperature as possible.

Information for the Product user:

1. Please note the requirement to dispose of Waste Electrical & Electronic Equipment separately from household waste (WEEE marked with crossed out wheeie bin symbol).
2. Please consider your role in contributing to re-use and recycling by returning this product at end of life to a collection centre for waste electrical equipment or a Civic Amenity site, or to a retail outlet from which you are purchasing a replacement.
3. This equipment may contain substances that are hazardous to health and the environment if disposed of carelessly. It is important that it is separated from normal household waste and recycled in the WEEE chain.
4. The "crossed out wheeie bin symbol" on a product indicates this equipment must not be disposed of in normal household waste, but should be disposed of according to local WEEE regulations.

The Installation must be carried out by a qualified electrician

TIME SENSOR
Se apaga a los 10 s, 30 s, 1 min, 3 min o 5 min
Turns off after 10 s, 30 s, 1 min, 3 min o 5 min
S'éteint après 10 s, 30 s, 1 min, 3 min o 5 min

MOTION SENSOR
Detecta a 0.1m, 1m o 2m de distancia.
Detects 0.1m, 1m or 2m away.
Détection à 0.1 m, 0.1 m ou 0.1 m de distance.

LIGHT SENSOR
Enciende por debajo de los 50lx, 200lx o 1000lx
Turns on below 50lx, 200lx o 1000lx
Allumer en dessous de 50lx, 200lx o 1000lx

3 CTT SWITCH
Selecione la temperatura de color 2K7,3K,4K
Select desired colour temperature 2K7,3K,4K
Sélectionnez la température de couleur 2K7,3K,4K