




## Residual current circuit breaker TC 2P 100A 300mA type A

Internal Reference: F9100203A

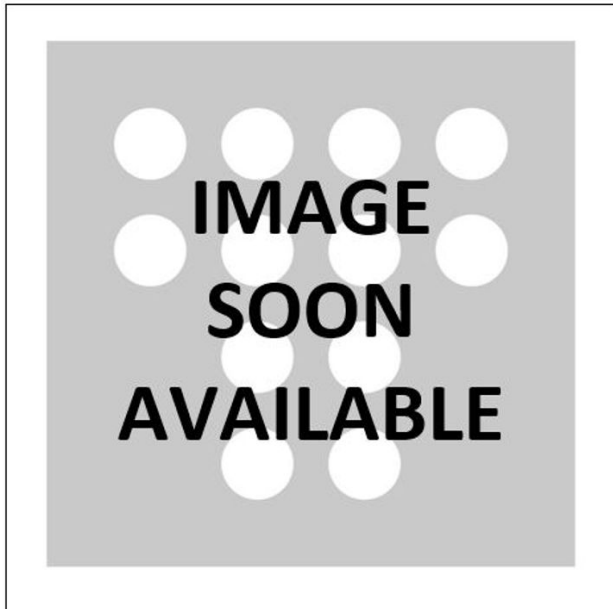

Limited resistance to transient overloads 250A 8/20 $\mu$ s.

Protected against unintended tripping.

Complies with the standard  
NBN EN 61008-1-1 based on EN 61008-1:2004  
+ A11:2007 and  
NBN IN 61008-2-1:1994 + A1:1998  
Conforms to thermal requirement 3kA 22.5kA<sup>2</sup>s.

### Characteristics

I(diff)	300 mA	I(n)	100 A
U(n)	240 V	Modules	2
Poles	2	Type	A
Code	157976	Rated switching capacity (EN 61008)	10 kA