


Insulating mat class 3 1x10m

Internal Reference: SOFAD3-10100

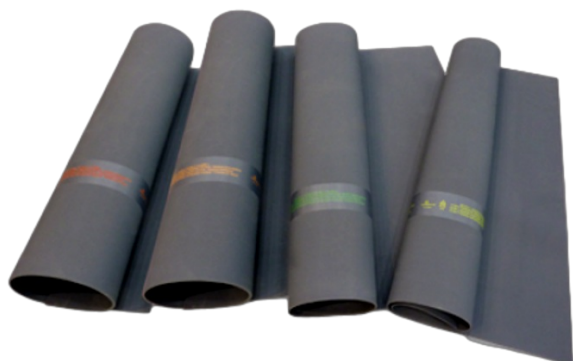

Rubber base: SBR natural rubber
 Specific weight: 1.51 g / cm³ (specific gravitad)
 Hardness: 71 Shore A
 Tensile strength: 75.5 kg / cm²
 Elongation at break: 362
 Tear strength: 20 kg / cm²
 Abrasion resistance: 182 mm³
 Temperature range: -40°C / +70°C

Chemical resistance:
 Diluted acids and bases - Moderate
 Concentrated acids and bases - Not recommended
 Hydrocarbons - Not recommended
 Organic solvents - Not recommended

Complies with IEC 61111 standard

We can customize mat lengths according to customer requirements (maximum 10 m).

Characteristics

| | | | |
|-----------------|-------------|-----------|--------|
| Dimension | 1 x 10 m mm | Weight | 48 g |
| Working voltage | 26500 | Thickness | 3,2 mm |
| Classe | 3 | | |