




## Flush-fit wiring boxes hollow walls dual D68x48

Internal Reference: D702K

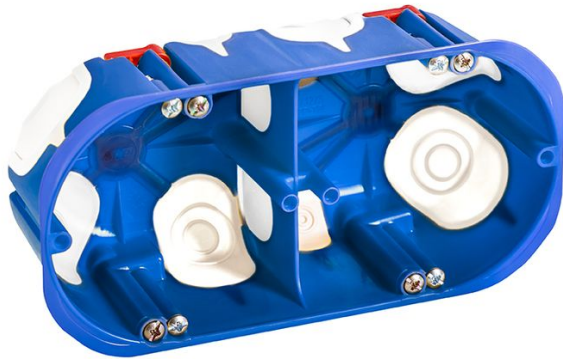

The screws for hollow wall-mounting are supplied assembled in all references

All references with double-injection elastic entries

References 2K-3K with partition

Self-extinguishing PP+TPE

Blue base : RAL5002

Flush fit - Hollow walls. (Glow wire resistance 850

- C)

### Characteristics

Depth	48 mm	Diameter	68 mm
Packaging	80 pcs		

