


## Cylindrical Compact Modular Fuse Holders 8x32

- 400Vac
- Standard : IEC/EN 60269

| rated current | poles | modules | for fuse  | tension  | article |
|---------------|-------|---------|-----------|----------|---------|
| 25 A          | N     | 1       | 8 x 32 mm | 400 V AC | 59219   |
| 25 A          | 1     | 1       | 8 x 32 mm | 400 V AC | 59211   |
| 25 A          | 1+N   | 1       | 8 x 32 mm | 400 V AC | 59216   |
| 25 A          | 1+N   | 2       | 8 x 32 mm | 400 V AC | 59217   |
| 25 A          | 2     | 2       | 8 x 32 mm | 400 V AC | 59212   |
| 25 A          | 3     | 3       | 8 x 32 mm | 400 V AC | 59213   |
| 25 A          | 3+N   | 3       | 8 x 32 mm | 400 V AC | 59215   |
| 25 A          | 3+N   | 4       | 8 x 32 mm | 400 V AC | 59214   |
| 25 A          | 4     | 4       | 8 x 32 mm | 400 V AC | 59218   |

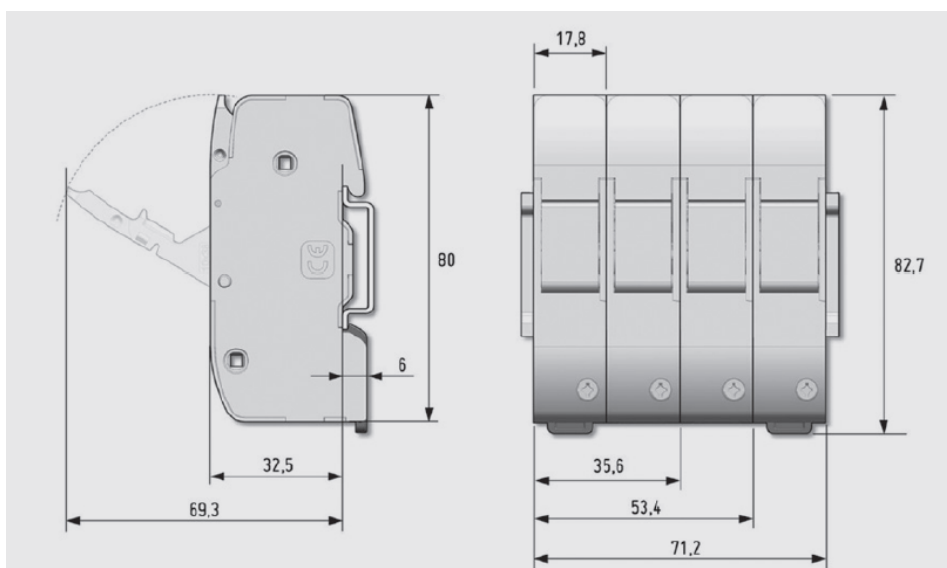

Siège social/Maatschappelijke zetel

**Teconex S.A./N.V.**

Rue de Magnée, 108 - 4610 Beyne-Heusay - Belgium

Tél.: +32 (0)4 358 85 75 - Fax: +32 (0)4 358 23 73

[www.teconex.be](http://www.teconex.be)

**Vlaanderen**

Spinnerslaan, 10 - 9160 Lokeren - Belgium

Tel.: +32 (0)9 245 09 56 - Fax: +32 (0)9 221 09 62

[www.teconex.be](http://www.teconex.be)

**N° entreprise:** BE0429524116 - **RPM LIEGE** - **BNP PARISBAS FORTIS:** BE86 2400 2371 1450 - **BIC:** GEBABEBB

**ING:** BE69 3400 1106 2078 - **BIC:** BBRUBEBB - **KBC:** BE73 4410 6243 0160 - **BIC:** KREDBEBB

**CBC:** BE75 1960 2966 2251 - **BIC:** CREGBEBB - **CCP:** BE79 0001 4191 4333 - **BIC:** BPOTBEB1

|                                   |                                   |                                                                             |
|-----------------------------------|-----------------------------------|-----------------------------------------------------------------------------|
| RATED CURRENT                     |                                   | 25 A                                                                        |
| RATED VOLTAGE                     |                                   | 400 V                                                                       |
| RATED POWER DISSIPATION           |                                   | 2,5 W                                                                       |
| UTILIZATION CATEGORY              |                                   | AC-22B 400 V                                                                |
| PROTECTION DEGREE                 |                                   | IP-20                                                                       |
| OPERATING TEMPERATURE             |                                   | -20 ... 70 °C                                                               |
| STORAGE TEMPERATURE               |                                   | -40 ... 80 °C                                                               |
| DERATING TEMPERATURE              | 20 °C                             | 1                                                                           |
|                                   | 30 °C                             | 0,95                                                                        |
|                                   | 40 °C                             | 0,9                                                                         |
|                                   | 50 °C                             | 0,8                                                                         |
| DERATING N° OF POLES              | 1 ... 4                           | 1                                                                           |
|                                   | 5 ... 6                           | 0,8                                                                         |
|                                   | 7 ... 9                           | 0,7                                                                         |
|                                   | ≥ 10                              | 0,6                                                                         |
| FIXING                            | RAIL DIN / EN                     | •                                                                           |
|                                   | SCREW                             | —                                                                           |
| CONNECTING WIRE                   |                                   | 0,75...16 mm <sup>2</sup><br>STRANDED<br>0,75...16 mm <sup>2</sup><br>SOLID |
| WITH LIGHTNING INDICATOR          |                                   | 120...400V AC                                                               |
| MAX. TIGHTENING TORQUE            |                                   | 2,5 Nm                                                                      |
| WITH MICROSWITCH 5A-250V          | FUSING                            | —                                                                           |
|                                   | PREBREAKING<br>PRESENCE<br>FUSING | —                                                                           |
| MULTIPOLAR UNION WITH ACCESSORIES |                                   | •                                                                           |
| LABEL HOLDER                      |                                   | •                                                                           |
| LOCKING ACCESSORIES               |                                   | •                                                                           |

Siège social/Maatschappelijke zetel

**Teconex S.A./N.V.**

Rue de Magnée, 108 - 4610 Beyne-Heusay - Belgium

Tél.: +32 (0)4 358 85 75 - Fax: +32 (0)4 358 23 73

[www.teconex.be](http://www.teconex.be)

**Vlaanderen**

Spinnerslaan, 10 - 9160 Lokeren - Belgium

Tel.: +32 (0)9 245 09 56 - Fax: +32 (0)9 221 09 62

[www.teconex.be](http://www.teconex.be)

**N° entreprise:** BE0429524116 - **RPM LIEGE** - **BNP PARISBAS FORTIS:** BE86 2400 2371 1450 - **BIC:** GEBABEBB

**ING:** BE69 3400 1106 2078 - **BIC:** BBRUBEBB - **KBC:** BE73 4410 6243 0160 - **BIC:** KREDBEBB

**CBC:** BE75 1960 2966 2251 - **BIC:** CREGBEBB - **CCP:** BE79 0001 4191 4333 - **BIC:** BPOTBEB1