


## Inter. diff. Teco 4P 25A 300mA Type B Var. F.

Référence interne: F925403GBFQ

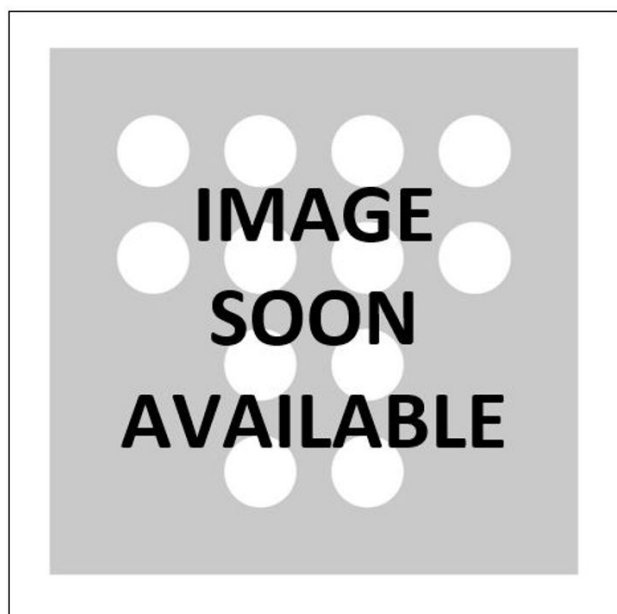

Mechanical indicator:  
red-white : position on  
green-white : position off after manual switch-off  
green-blue : position off after error or pressing the test button

LED indicator  
green : the loss current is less than 30% of the maximum loss current (normal situation)  
yellow : the loss current is more than 30% of the maximum loss current  
red : the loss current is more than 50% of the maximum loss current

Has a potential-free contact (for remote signalling) which is activated in parallel with the yellow LED. When the residual circuit breaker is switched off, the contact remains closed until the circuit breaker is switched on again.

Limited resistance to transient overloads 3kA 8/20 $\mu$ s.

Insensitive to frequency converters.

Conforms to  
NBN EN 61008-1 based on EN 61008-1:2012 and  
NBN EN 61008-2-1 based on EN 61008-2-1:1994 + A11:1998 and  
NBN EN 62423:2013  
Conforms to thermal requirement 3kA 22.5kA<sup>2</sup>s.

Electrical insulation: > 4mm between contacts.

(!) Attention: always connect the power supply (arrival) at the top (see also manual).

## Caractéristiques

I(diff)	300 mA	I(n)	25 A
U(n)	400 V	Modules	4
Pôles	4	Type	B
Code	192735	Pouvoir de coupure (EN 61008)	10 kA
Digital	Oui	Pour environnements avec var. de fréq.	Oui