


YALA Back Lite 295x1195mm RA80 24-49W 3000K-4000K UGR<19 IP40

Référence interne: LTY26X312CT19

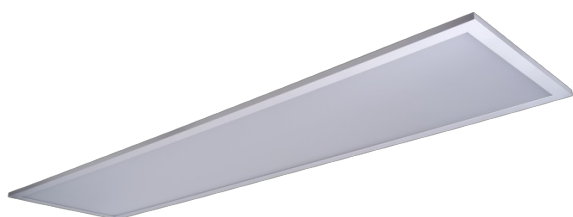

- Dalles LED 300x1200 - Avec diffuseur prismatique- sans driver.
- ° Boîtier en tôle d'acier.° RAL 9003.
- ° 24W 700mA 3000K>3230LM - 24W 4000K>3450LM.
- ° 37W 1050mA 3000K>4730LM - 37W 4000K>4950LM.
- ° 49W 2X700mA 3500K>6440LM
- ° CIE Flux Code :25-37W **60 87 96 100 102**
- ° CIE Flux Code :49W **59 86 96 100 102**
- ° Accessoires :
 - Kit de montages disponibles.
 - Kit d'éclairage de sécurité 3H Li-Ion Autotest

Caractéristiques

Hauteur	30 mm	Longueur	1195 mm
Puissance	26 W	Largeur	295 mm
Couleur	Blanc	IP	40
mA CC	700-1050mA	Lumen	3200-4900lm
Kelvin	3000	IRC (Ra)	>80
Angle	100 °	Code Flux CIE	60 87 96 100 100
Index L-B	L70B10 100.000h @25°C, L70B50 100.000h @40°C		

