


## Residual current circuit breaker TC 4p 63A 30mA Dig. Type A

Internal Reference: F9634003DGA

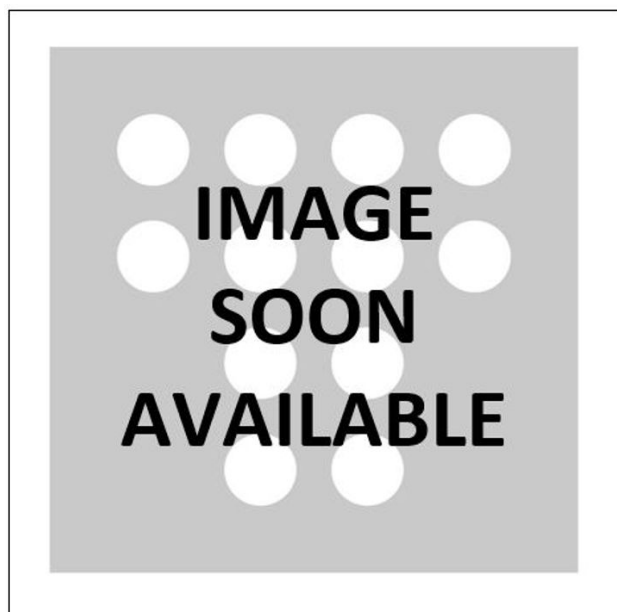

Mechanical indicator:  
red-white : position on  
green-white : position off after manual switch-off  
green-blue : position off after error or pressing the test button

LED indicator  
green : the loss current is less than 30% of the maximum loss current (normal situation)  
yellow : the loss current is more than 30% of the maximum loss current  
red : the loss current is more than 50% of the maximum loss current

Has a potential-free contact (for remote signalling) which is activated in parallel with the yellow LED. When the residual current breaker is switched off, the contact remains closed until the circuit breaker is switched on again.

Limited resistance to transient overloads 3kA 8/20 $\mu$ s.

Conforms to  
NBN EN 61008-1-1 based on EN 61008-1:2004 + A11:2007 and  
NBN EN 61008-2-1:1994 + A1:1998.  
Conforms to thermal requirement 3kA 22.5kA<sup>2</sup>s.

Electrical insulation: > 4mm between contacts.

(!) Attention: always connect the power supply (arrival) at the top (see also manual).

## Characteristics

I(diff)	30 mA	I(n)	63 A
Modules	4	Poles	4
Type	A	Code	194478
Curve	A	Rated switching capacity (EN 61008)	10 kA
Digital	Oui		